

AC

Automatic High-speed Folding Gluing Machine

全自动高速糊箱机





产品简介

BRIEF INTRODUCTION

AC系列分組式糊箱机，整机采用电动调板，PLC控制，进口电子原件配置，给纸部采用独立电机控制，轨道式运行，性能稳定，可操控性强。本机专业针对各种卡纸，瓦楞包装盒，采用纠边功能，使瓦楞盒完美结合了自动化包装行业的需求。（如有功能要求，我们可以根据客户需求另行设计）

Series AC folding gluing machine, adopts advanced domestic technology, PLC and imported electronic components, feeding section adopt mechanic continuously variable, stable and easy to control and operate. The machine is especially designed for all kinds of cardboard, corrugated packaging boxes, has correction function, make corrugated boxes perfectly meet the requirements of auto packaging together. (We can customize of other size).


地基图 FOUNDATION DRAWING

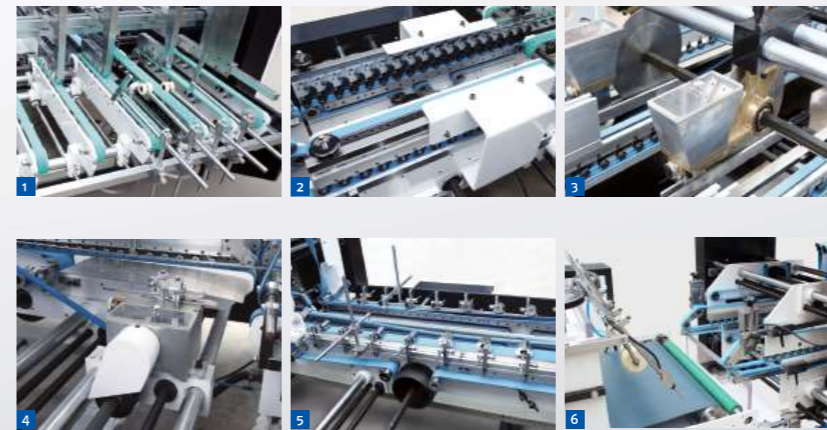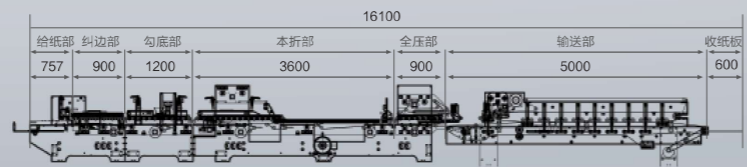

- 1 进纸部 FEEDER SECTION**
进纸部独立电机传动，皮带配备吸风功能。
Driven by independent motor, feeding belt has a function of air suction.
- 2 纠边部 ALIGNER SECTION**
纠边部配有自动修正装置，对出纸产生的歪斜现象进行修复，确保纸张准确输送。
Equipped with auto-correction device to correct the obliquity and ensure the correct feeding.
- 3 勾底部 BOTTOM-LOCK SECTION**
勾底部，上胶部配有上糊筒打胶功能。Equip with the upper and lower gluing tank.
- 4 本折上部部 LOWER GLUING TANK**
本折上部部，上胶部配有下糊筒打胶功能。Equip with the lower gluing tank.
- 5 本折部 FOLDING AND CLOSING SECTION**
本折部配有左右锥轮调速皮带快慢功能。
Folding section equipped with cone pulley in left and right to adjust belt speed.
- 6 拍齐部 SQUARING DEVICE**
配有拍齐功能，有效改善瓦楞产品喇叭口现象。
Equipped with squaring device, can effectively avoid the "scissors mouth" phenomenon of corrugated products.


普通盒型 STRAIGHT LINE BOX

型号/型号 ITEM/MODEL	1200Type	1450Type	1600Type
A	250-1200	300-1450	300-1600
B	80-700	80-1000	80-1000
C	120-600	150-730	150-800




勾底盒型 CRASH LOCK BOTTOM BOX

型号/型号 ITEM/MODEL	1200Type	1450Type	1600Type
A	280-1200	300-1450	300-1500
B	80-700	100-700	100-700
C (min)	25	25	25
D (min)	35	35	35
E (min)	100	110	110



双侧边贴合 DOUBLE SIDES BOX

型号/型号 ITEM/MODEL	1200Type	1450Type	1600Type
A	250-1050	250-1200	250-1350
B	100-800	100-1000	100-1000
C (min)	10-50	10-50	10-50
D (min)	80	80	80
E (min)	230	230	230



主要技术参数 MAIN TECHNICAL PARAMETERS

型号 MODEL	1200AC	1450AC	1600AC	选配 Optional
纸质材料 Paper material	卡纸 Cardboard 210-800g, A/B/E 瓦楞 A/B/E Corrugated			• 勾底功能
空载最高线速度 Max. Liner speed	300m/min			• 喷胶功能
给纸方式 Feeding way	自动连续给纸 Automatically and continuously feeding			• 等离子功能
折盒方式 Way of folding in reverse	第二折与第四折为180°，Fold 2 and fold 4 are 180°			• Bottom lock
糊剂 Glue	水溶性冷剂 Water-base cold glue			• Spraying System
电源电压 Power supply	3P 380V 50HZ			• Plasma processor
整机功率 Total power	14 kw	17.5 kw	20 kw	• 勾底尺寸另加1.3m
整机重量 Weight	8T	9T	10T	• Crash lock bottom
外形尺寸 Overall dimension	13.5×1.85×1.6m	13.5×2.1×1.6m	15×2.3×1.6m	function will be 1.3m longer

注:数据如有更改,恕不另行通知。(Notes:If any change of data, we will not notify further.)